



UNBRAKED DRAWBAR


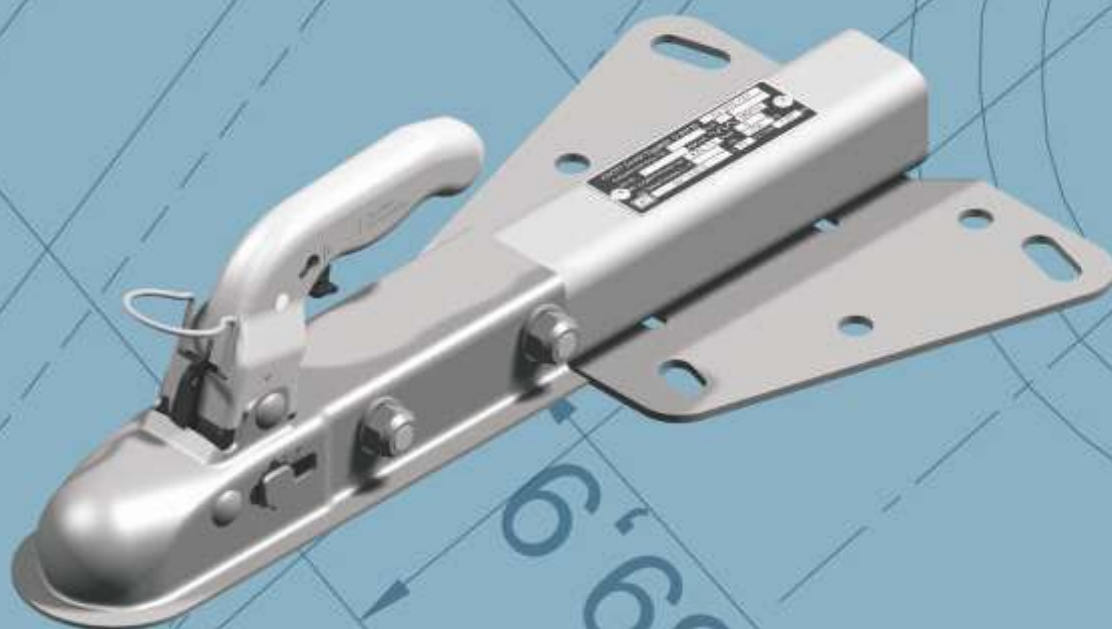


“V FLANGE” DRAWBAR KZE 7,5

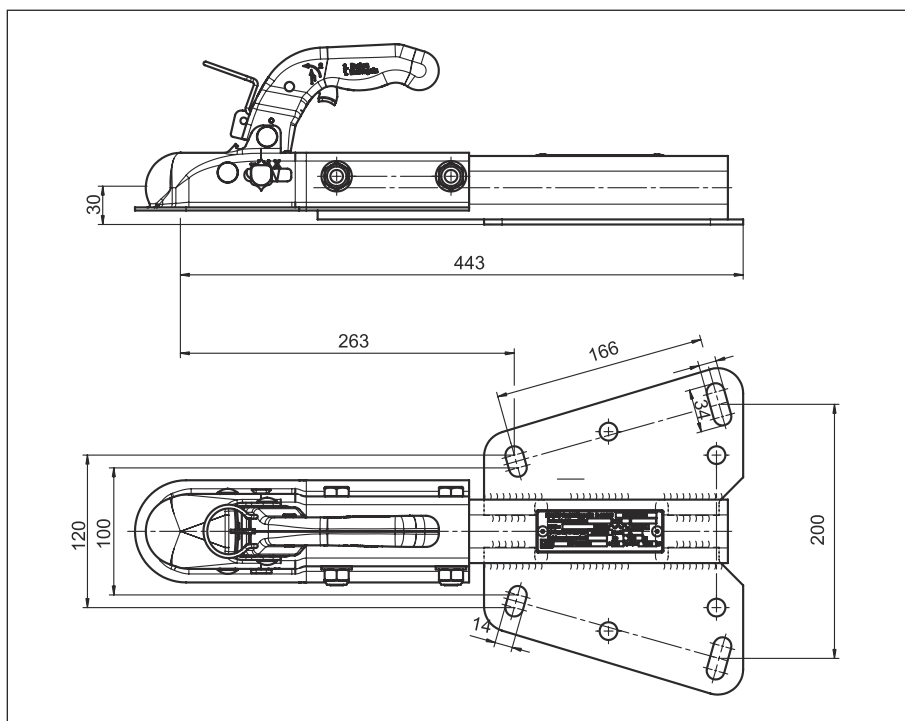




Type	Coupling head	Dc-value (KN)	Vertical load (max. kg) at the coupling point	GVWR (kg)	EC-number	Article number
KZE 7,5	K7,5FN3	7,2	75	750	00-1530	6A2077.001

A FRAME DRAWBAR (welded version)

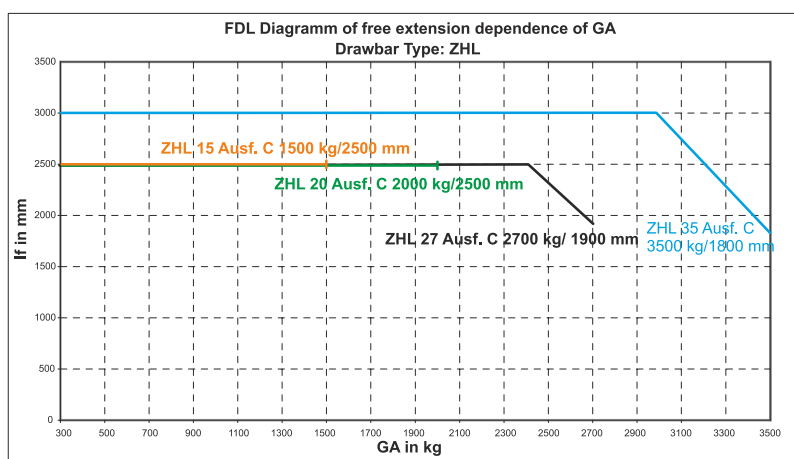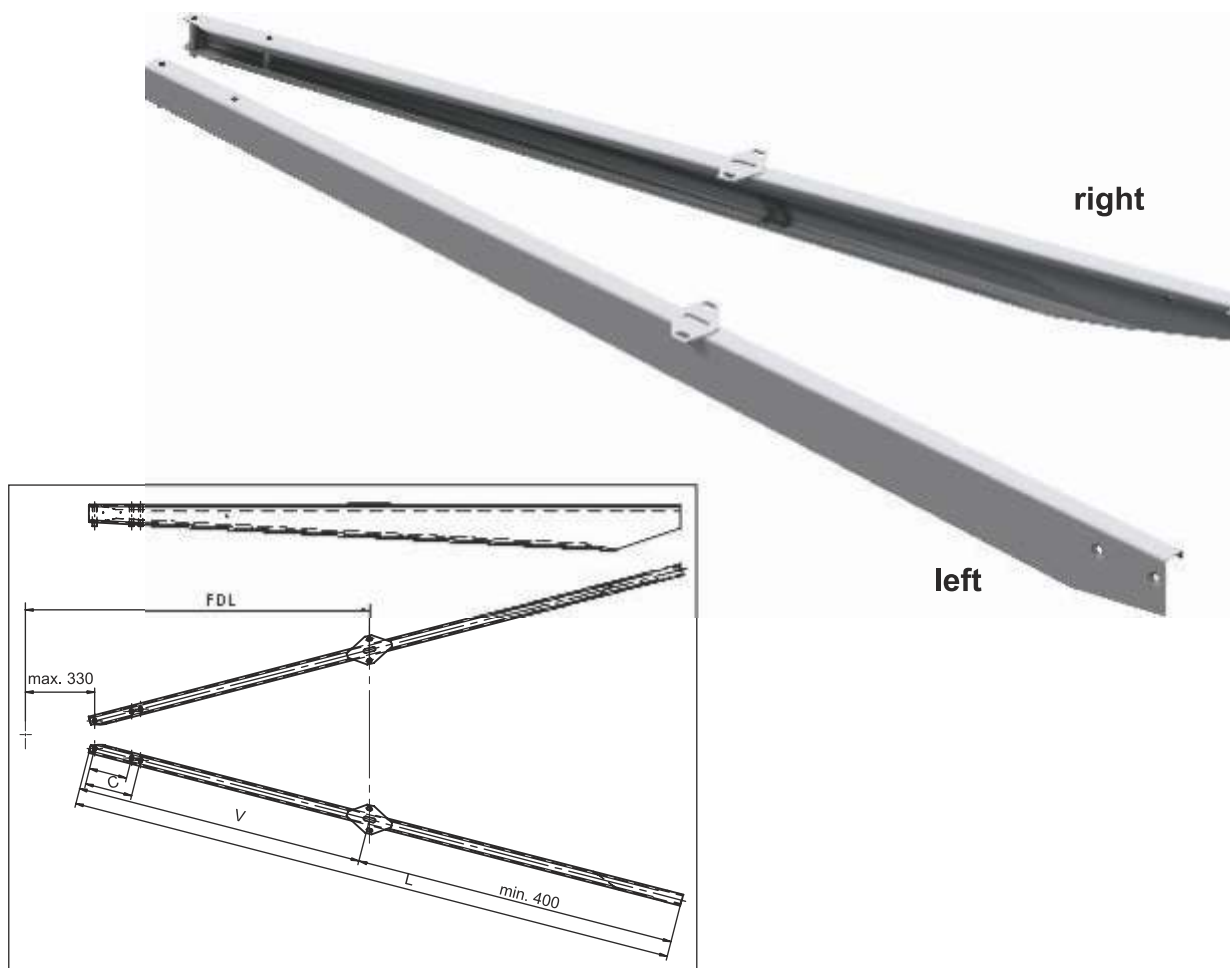



Type	Version	D-value (KN)	Vert. load (max. kg)	FDL	C (mm)	V (mm)	L (mm) min - max.	EC-number	ECE-number	Drawing number
ZHL 15	C	17	100	1800 kg/ 2500 mm	130/166	1195	1500 - 3500	00-0565	55R-010565	6A4719
ZHL 20	C	22	100	2400 kg/ 2500 mm	166	931	1500 - 3500	00-0579	55R-010579	6A5280
ZHL 27	C	31	300	3500 kg/ 1800 mm	166	1023,5	1500 - 3500	00-0300	55R-010300	6A4003
ZHL 35	C	31	350	3500 kg/ 2500 mm	166/207	1260	1250 - 4000	00-0729	55R-010729	6A4790

A FRAME DRAWBAR (montable version)

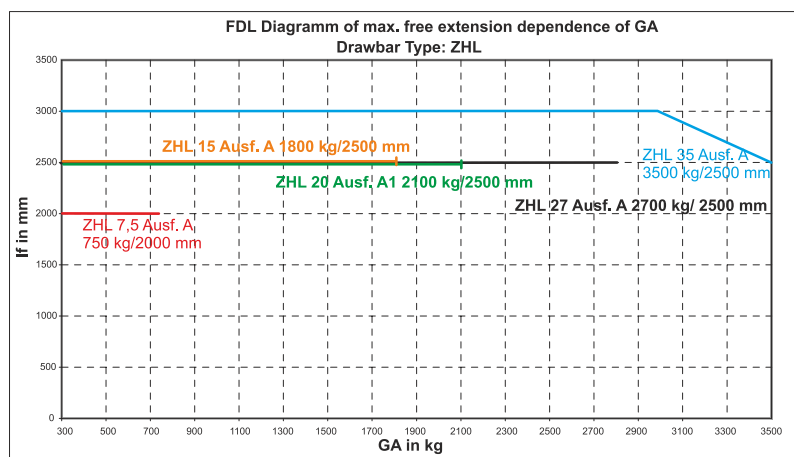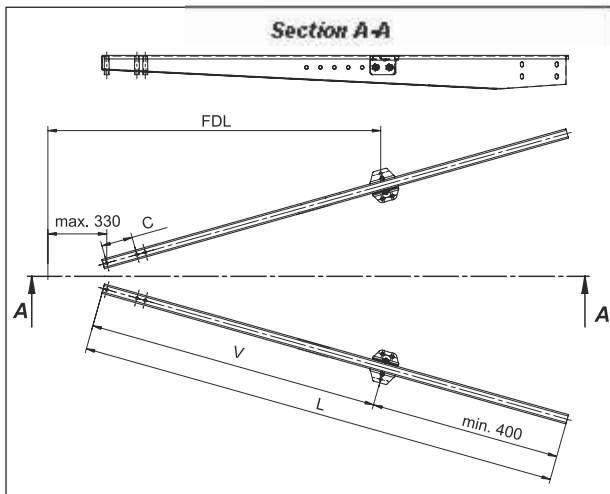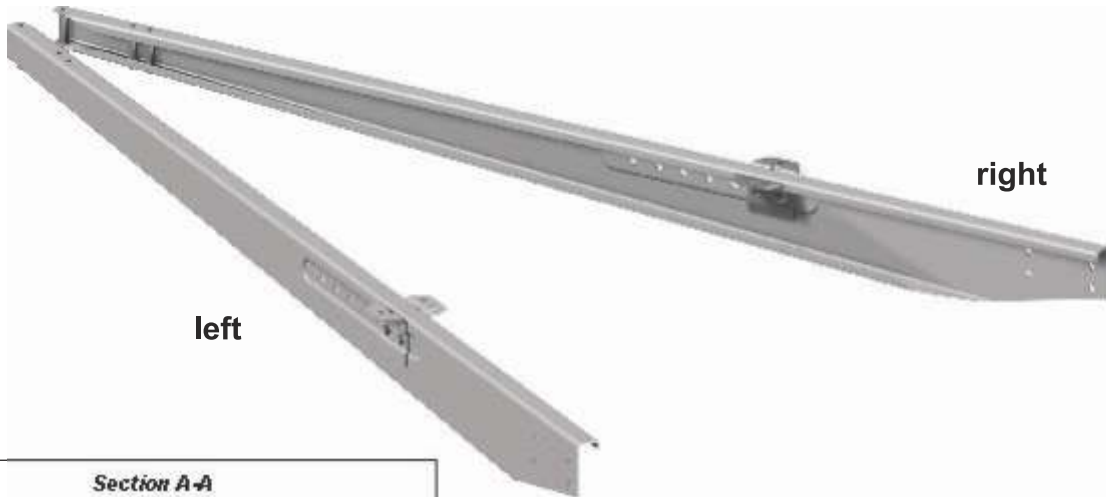

Type	Version	D-value (KN)	Vert. load (max. kg)	FDL	C (mm)	V (mm)	L (mm) min - max.	EC-number	ECE-number	Drawing number
ZHL 7,5	A	7,2	75	750 kg/ 2000 mm	166	1267	1500 - 3500	—	55R-011960	6B4465
ZHL 15	A	17	100	1800 kg/ 2500 mm	130/166	1210	1500 - 3500	00-0565	55R-010565	6A4507
ZHL 20	A1	22	100	2100 kg/ 2500 mm	166	910-1210	1500 - 3500	00-0579	55R-010579	6A1136
ZHL 27	A	31	300	3500 kg/ 1800 mm	166/207	910-1210	1500 - 3500	00-0300	55R-010300	6A1176
ZHL 35	A	31	350	3500 kg/ 2500 mm	166/207	1130-1430	1250 - 4000	00-0729	55R-010729	6A2775



DRAWBAR (Round)

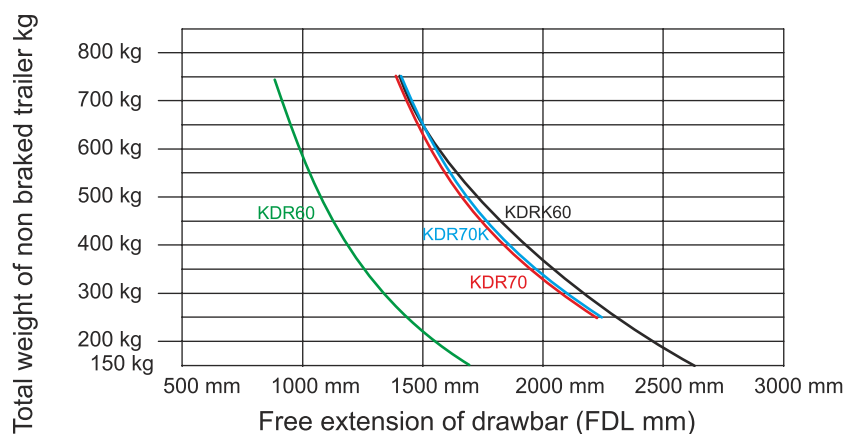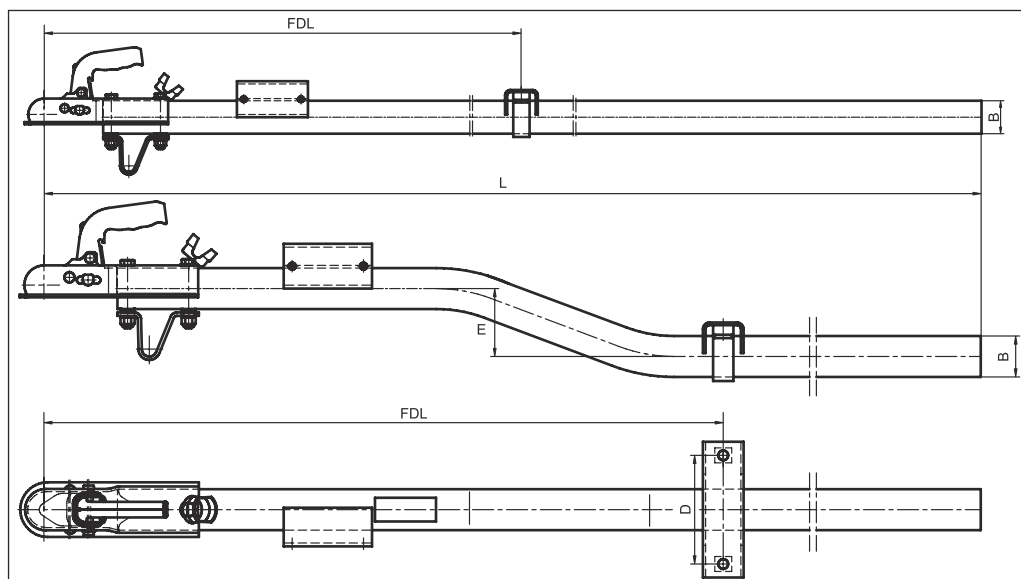

Type	Coupling head	Vert. Load (kg)	GVWR (kg)	E (mm)	FDL (mm)	D (mm)	B (mm)	"L" (mm) Standard max.	EC-number	Article number
KDR60	K14BN3	75	750	-	900	160	Ø60×3,6	2000 6108	-	6A1249.002
KDR70	K14CN3	75	750	-	1390	160	Ø70×4	2000 6108	00-0887	6A1246.004
KDRK60 cranked	K14BN3	75	750	100	1392	160	Ø60×3,6	2000 5800	-	6A1252.002
KDRK70 cranked	K14CN3	75	750	100	1365	160	Ø70×4	2000 5800	00-0947	6A1248.001

The overrunning can be ordered either with DIN or with NATO eye



DRAWBAR (Square)

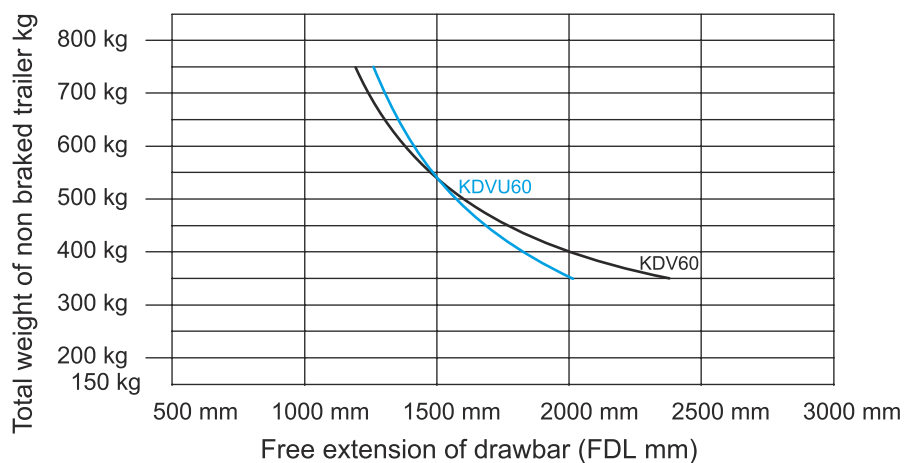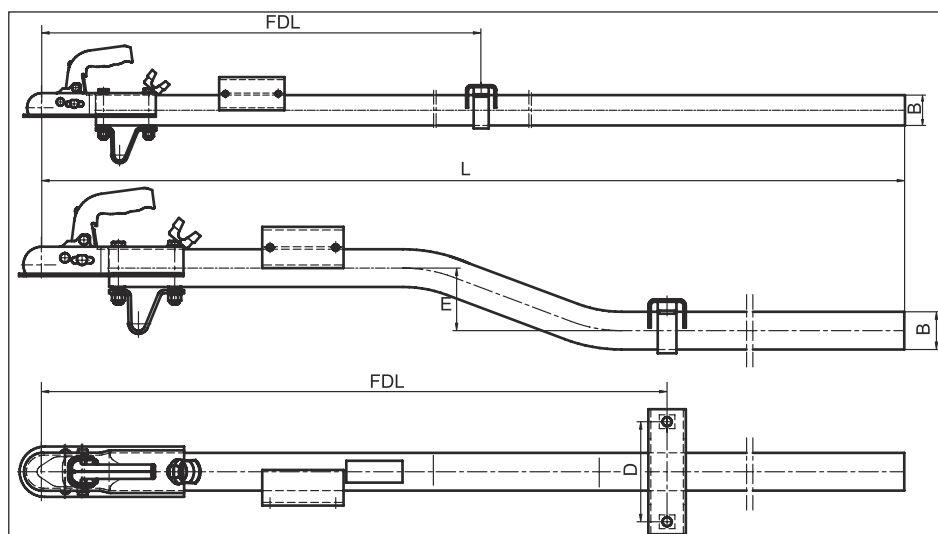

Type	Coupling head	Vert. Load (kg)	GWWR (kg)	E (mm)	FDL (mm)	D (mm)	B (mm)	L (mm)	EC-number	Article number
KDV60-E	KQ14BN3	100	750	-	1264	115	60×60×4	2515	00-1443	6A3395.001
KDV70-E	KQ14CN3	100	1400	-	1355	160	70×70×5	2997	00-1444	6A3902.001
KDVU60-B cranked	K7,5LN3	75	750	90	1227	160	60×60×3	1770	00-1877	6B6891.001

The overrunning can be ordered either with DIN or with NATO eye


HEIGHT ADJUSTABLE DRAWBAR KDVV 7,5

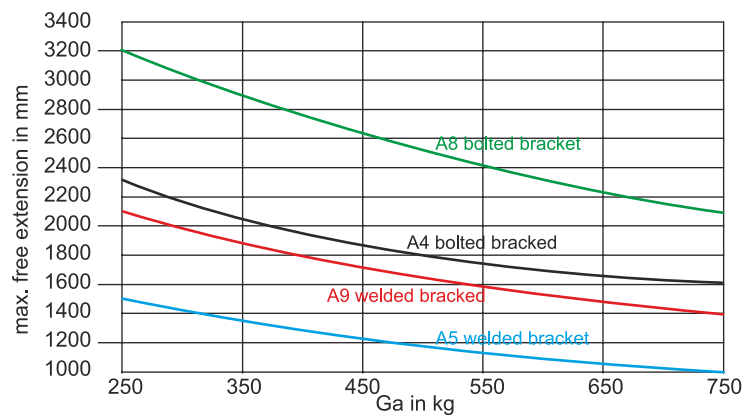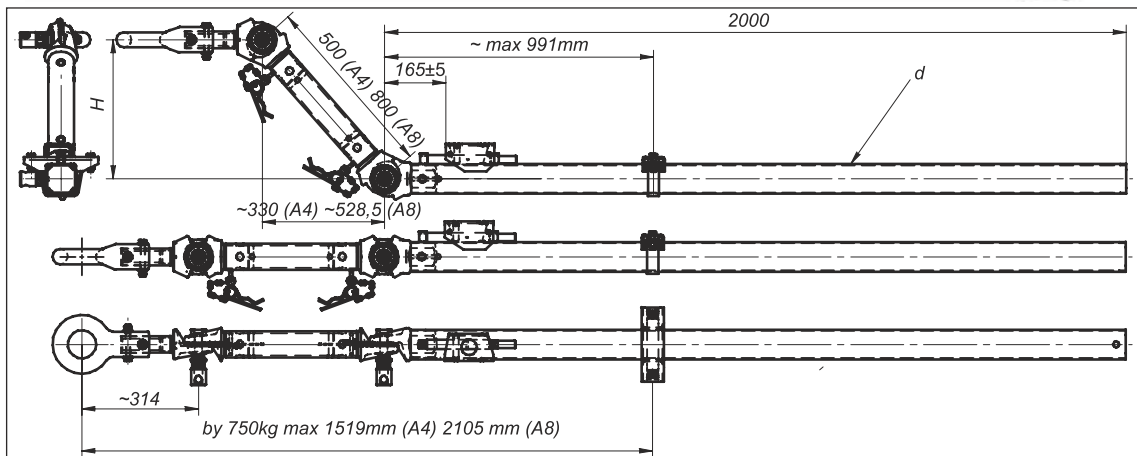

Type	Coupling	Vert. Load (kg)	GVWR (kg)	Adjustable Height H (mm)	d (mm)	EC-number	Article number
KDVV 7,5 A4	NATO45	100	750	375	80×80×3	00-1271	6G0020.100
KDVV 7,5 A4	DIN45	100	750	375	80×80×3	00-1271	6G0020.110
KDVV 7,5 A4	KK14BN3	100	750	375	80×80×3	00-1271	6G0020.120
KDVV 7,5 A8	NATO45	100	750	600	80×80×4	00-1271	6G0021.100
KDVV 7,5 A8	DIN45	100	750	600	80×80×4	00-1271	6G0021.110
KDVV 7,5 A8	KK14BN3	100	750	600	80×80×4	00-1271	6G0021.120

These drawbars can be ordered with welded-on mounting bracket too.

There is no trailer without us

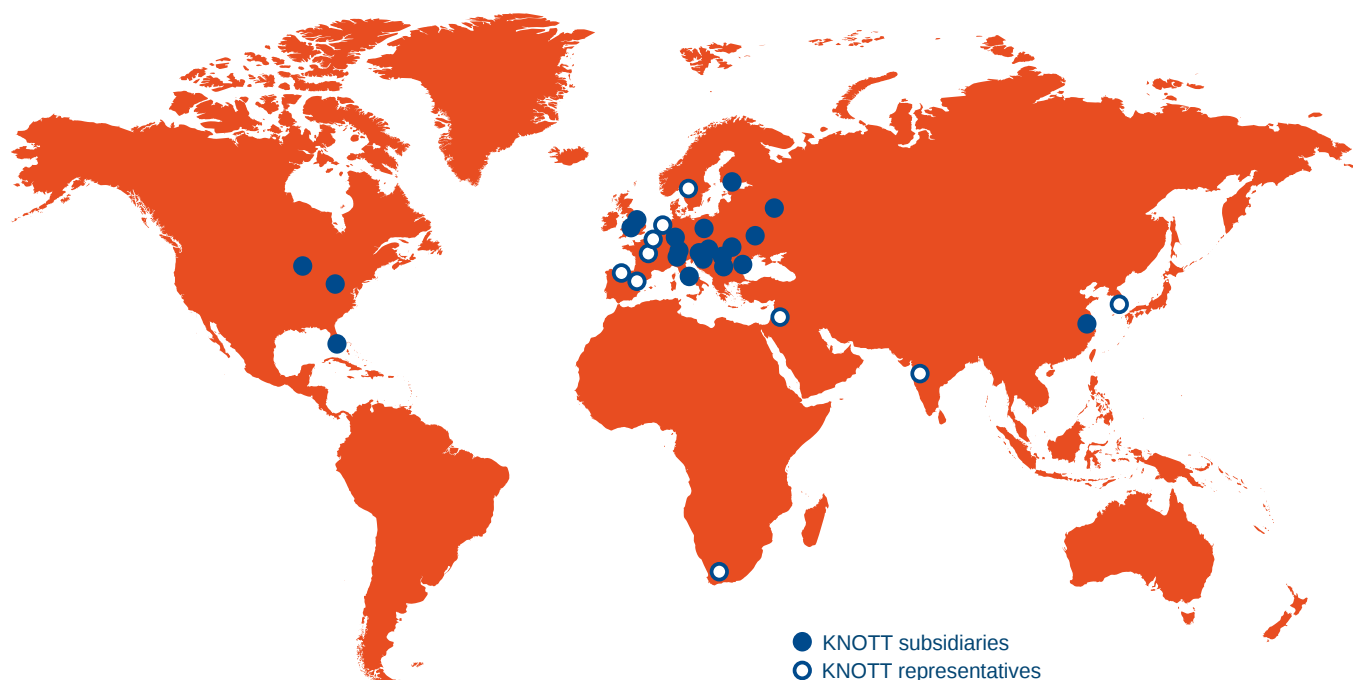

The Knott Group - global competency

The member companies of the Knott Group design, develop, produce and market braking systems for commercial and off-highway vehicles together with running gear components for trailers.

Competent, one-to-one consulting and outstanding product quality are characteristic of all the companies within the Group.

KNOTT's own production plants and branch offices are supported by a world-wide dealership network.



www.autoflex.ro

KNOTT GROUP
BRAKE AND TRAILER TECHNOLOGY

Presented by:

AUTOFLEX SRL

Tel.: (+40) 259/373-495 Fax: (+40) 259/406-748
RO-415500 Salonta - Sos. Aradului km 75+300 - Romania
web: www.autoflex.ro e-mail: info@autoflex.ro